杭州平达电子机械有限公司

HANGZHOU PINGDA ELECTRIC & MACHINERY CO.,LTD.

地址：浙江省杭州市余杭区良渚街道安溪工业园区前山路 6 号　　**邮编** Postcode：311113

No.6 Qianshan Road, Anxi Industry Region, Liangzhu Town, Yuhang District, Hangzhou City, Zhejiang Province 311113, P.R.China

电话 Tel：+86 571 88397977 88792111 88796338　　**传真** Fax 571 88791838

邮箱 E-mail：sales@pingda.cn　　**网址** http://www.pingda.cn http://hzpingda.en.alibaba.com

PING DA®



PRODUCT CATALOGUE

服务 · 发展 · 合作 · 共赢

产品手册

杭州平达电子机械有限公司

HANGZHOU PINGDA ELECTRIC & MACHINERY CO.,LTD.



杭州平达电子机械有限公司创建于 1992 年，专业生产塑封机，冷裱机，覆膜机，装订机等办公文化用品。公司成立以来，一直不断地改进和提高产品质量，因为我们坚信只有质量才是企业谋生存，求发展之本，也正是本着良好的质量，我们在同行中享有盛誉，在国内外市场有长期合作和稳定的客源。

目前我公司主要以“平达牌”或者客户 OEM 的形式销售塑封机，冷裱机，覆膜机等系列办公文化用品，产品已远销美国，英国，德国，荷兰，俄罗斯，韩国，印度，巴基斯坦，孟加拉，新加坡，马来西亚，泰国，越南，印尼伊朗，以色列，墨西哥，巴西，秘鲁，智利等二十多个国家和地区，产品深受好评，知名度较高，并拥有了一大批忠实的客户，我公司也不断努力发展产品以回报客户的支持。

本公司有雄厚的研发能力，不断开发，研制新技术，新产品及先进的生产工艺等，现为行业龙头企业，且本公司生产的许多塑封机，覆膜机都已取得不同国家的安全认证，如 CE、UL、KC 等。

Hangzhou Pingda Electric & Machinery Co.,Ltd.established since 1992,specialized in manufacturing pouch laminator,roll laminator,cold laminator and binding machine etc.office equipment.We keep improving our products quality,as we believe in quality makes us survive in the market,and quality makes us develop healthily.And we have good reputation in the market and cooperate with customers from world wide in long term due to quality.

We sell pouch laminator,roll laminator,with your own brand PINGDA and OEM customers'brands in many countries,such as United States,United Kingdom,Germany,Netherlands,Russia,South Korea,India,Pakistan, Banglades h,Singapore,Malaysia,Thailand,Vietnam,Indonesia,Iran and Israel,Mexico,Brazil,Peru.Chile ect., our products have great reputation in more than 20 countries so that we gain a lot of loyal customers for our products.In the other hand,we try our best to improve and develop our products in return for our customers support.

Hangzhou Pingda Electric & Machinery Co.,Ltd.has great ability to research and develop new technology and new product with advanced crafts,now already become the leader in the industry of laminator,many pouch laminators and roll laminators already passed different countries safety test,such as CE,UL,KC,etc.



Certificate



目录 | CONTENTS

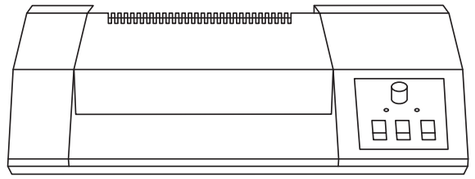

Laminator

Pouch Laminator

LCD Display Pouch Laminator

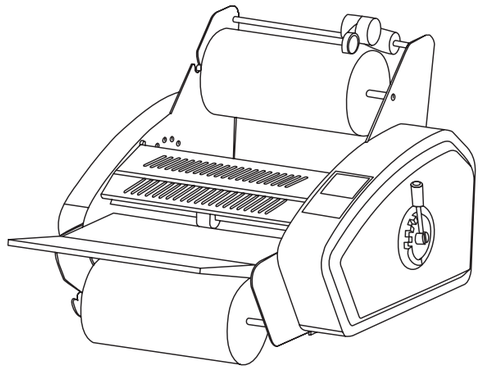

Roll Laminator

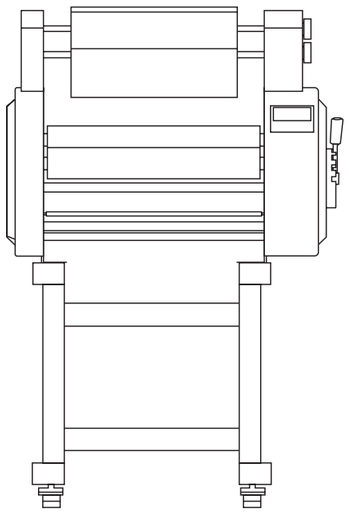

Hot Laminator

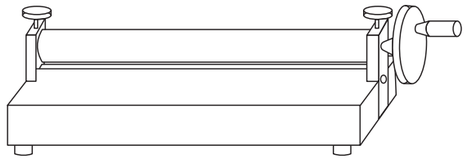

Cold Laminator

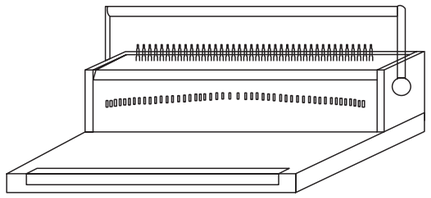

Binding Machine

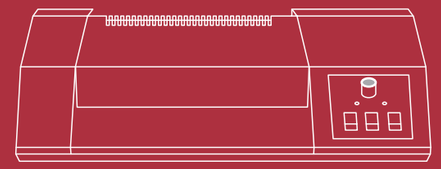

Laminator

Pouch Laminator

LCD Display Pouch Laminator

Best-Seller Pouch Laminator	01-03
Heated Roller Pouch Laminator	04
Eco Pouch Laminator	05
Pouch Laminator with Temperature Meter	06
Basic Pouch Laminator	07
Professional Pouch Laminator	08
Plastic Pouch Laminator	09
Speed and Dual Heating System Laminator	10
Speed and Heating System Laminator	11
LCD Display Pouch Laminator	12
Passport Pouch Laminator	13-14
LCD Display Pouch Laminator	15-19

PING DA®

Best-Seller Pouch Laminator

CHARACTERISTICS:

1. Various temperature, cold laminating function for different laminating needs.
2. High quality, low noise, stable motor.
3. Recoverable over-heat protection system, safer to machine and user.



PDA4-230C / PDA3-330C/PD-390C/PDA2-450C





PDA3–330C With handle

Model	PDA4-230C	PDA3-330C	PDA3-330C With handle	PD-390C	PDA2-450C
Laminating Width:	240mm	330mm	330mm	390mm	450mm
Laminating Speed:	0.52m/min				0.35m/min
Mounting Distance Between Rollers:	2mm				
Operation Temperature:	80-180℃				
Heating System(Optional):	Infrared heating lamp /mica sheet heater				
Warm Up Time:	3mins/5mins				
Laminating Thickness:	Up to 250mic				
Roller Diameter:	25mm				
Roller:	4				
Document Reverse Function:	Yes				
Cooling Fan:	1	2			
Power Consumption:	420W	620W		720W	820W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ				
Machine Body:	Metal				
Machine Dimension:	410x240x105mm	500x240x105mm		560x240x105mm	620X240X105mm
Machine Net Weight:	6.7kgs	8 kgs		9.5kgs	10.5kgs
Package:	2pcs/CTN				
Ctn Size:	48x30x33.5cm	56x30x33.5cm		62x30x33.5cm	68x30x33.5cm
Net Weight/Ctn:	13.4kgs	16kgs		19kgs	21kgs
Gross Weight/Ctn:	15.2kgs	18kgs		21kgs	23kgs

Best-Seller Pouch Laminator

CHARACTERISTICS:

1. Various temperature, cold laminating function for different laminating needs.
2. High quality, low noise, stable motor.
3. Recoverable over-heat protection system, safer to machine and user





PD230-1/PD330-1



PDA4-230X/PDA3-330X

Model	PD230-1	PD330-1	PDA4-230X	PDA3-330X
Laminating Width:	240mm	330mm	240mm	330mm
Laminating Speed:	0.52m/min			
Mounting Distance Between Rollers:	2mm			
Operation Temperature:	80-160℃		80-180℃	
Heating System(Optional):	Infrared heating lamp/mica sheet heater			
Warm Up Time:	3mins/5mins			
Laminating Thickness:	Up to 250mic			
Roller Diameter:	25mm			
Roller:	4			
Document Reverse Function:	Yes			
Cooling Fan:	1	2	1	2
Power Consumption:	420W	620W	420W	620W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ			
Machine Body:	Metal			
Machine Dimension:	410x240x105mm	500x240x105mm	410x240x105mm	500x240x105mm
Machine Net Weight:	6.25kgs	7.6kgs	7kgs	8kgs
Package:	2pcs/CTN			
Ctn Size:	48x30x33.5cm	56x30x33.5cm	48x30x33.5cm	56x30x33.5cm
Net Weight/Ctn:	12.5kgs	15.2kgs	14kgs	16kgs
Gross Weight/Ctn:	14.2kgs	17.05kgs	16kgs	18kgs

Best-Seller Pouch Laminator

CHARACTERISTICS:

1. Various temperature, cold laminating function for different laminating needs.
2. High quality, low noise, stable motor.
3. Recoverable over-heat protection system, safer to machine and user.





PDA4-230L/PDA3-330L



PD230-2/PD330-2

Model	PDA4-230L	PDA3-330L	PD230-2	PD330-2
Laminating Width:	240mm	330mm	240mm	330mm
Laminating Speed:	0.52m/min			
Mounting Distance Between Rollers:	2mm			
Operation Temperature:	80-180℃		80-180℃	
Heating System(Optional):	Infrared heating lamp/mica sheet heater			
Warm Up Time:	3mins/5mins			
Laminating Thickness:	Up to 250mic			
Roller Diameter:	25mm			
Roller :	4			
Document Reverse Function:	Yes			
Cooling Fan:	1	2	1	2
Power Consumption:	420W	620W	420W	620W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ			
Machine Body:	Metal			
Machine Dimension:	410x220x105mm	500x220x105mm	410x240x105mm	500x240x105mm
Machine Net Weight:	6.25kgs	8kgs	6.25kgs	8kgs
Package:	2pcs/CTN			
Ctn Size:	48x30x33.5cm	56x30x33.5cm	48x30x33.5cm	56x30x33.5cm
Net Weight/Ctn	12.5kgs	16kgs	12.5kgs	16kgs
Gross Weight/Ctn:	14kgs	17.5kgs	14kgs	17.5kgs

Heated Roller Pouch Laminator

CHARACTERISTICS:

1. Advanced roller inside heating system.
2. Both hot and cold laminating functions for different laminating needs.
3. Various temperature settings for different materials, specially for professional laminating need.
4. High quality, low noise, stable motor.
5. Over-heat protection system, safer to machine and user.



PDA4-230CN



PDA3-330CN/PDA2-450CN



Model	PDA4-230CN	PDA3-330CN	PDA2-450CN
Laminating Width:	240mm	330mm	450mm
Laminating Speed:	0.52m/min		0.35m/min
Mounting Distance Between Rollers:	2mm		
Operation Temperature:	80-180℃		
Heating System(Optional):	roller inside heater		
Warm Up Time:	5mins		
Laminating Thickness:	Up to 250mic		
Roller Diameter:	25mm		
Roller :	4		
Document Reverse Function:	Yes		
Cooling Fan:	2		
Power Consumption:	320W	420W	620W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ		
Machine Body:	Metal		
Machine Dimension:	435x240x105mm	525x240x105mm	645x240x105mm
Machine Net Weight:	7.25kgs	8.75kgs	11kgs
Package:	2pc/CTN	2pcs/CTN	2pcs/CTN
Ctn Size:	50x30x33.5cm	58x30x33.5cm	71x30x33.5cm
Net Weight/Ctn	14.5kgs	17.5kgs	22kgs
Gross Weight/Ctn:	15.75kgs	18.75kgs	24kgs

Eco Pouch Laminator

CHARACTERISTICS:

1. Various temperature, cold laminating function for different laminating needs.
2. High quality, low noise, stable motor.
3. Recoverable over-heat protection system, safer to machine and user.



ECO-12



XL-320B/XL-320B-NEW







PRO-12

Model	XL-320B	XL-320B-NEW	PRO-12	ECO-12
Laminating Width:	320mm	320mm	330mm	330mm
Laminating Speed:	0.52m/min	0.4m/min	0.52m/min	0.41m/min
Mounting Distance Between Rollers:	2mm			
Operation Temperature:	100-160℃			90-150℃
Heating System:	Infrared heating lamp			
Warm Up Time:	3mins			
Laminating Thickness:	Up to 250mic			
Roller Diameter:	25mm	18mm	25mm	20mm
Roller :	4			
Document Reverse Function:	Yes			
Cooling Fan:	N/A			
Power Consumption:	620W	610W	620W	610W
Power Supplies(Optional):	AC110V-127V60HZ, AC220V-240V/50HZ			
Machine Body:	Metal			
Machine Dimension:	500x200x103mm	490x200x103mm	500x200x103mm	460x165x95mm
Machine Net Weight:	6.6kgs	5.05kgs	6.6kgs	4.6kgs
Package:	2pcs/CTN			4pcs/CTN
Ctn Size:	56.5x27x35cm	54.5x25.5x32.5cm	56.5X27x35cm	51x27x40.5cm
Net Weight/Ctn:	13.2kgs	10.1kgs	13.2kgs	18.4kgs
Gross Weight/Ctn:	15.2kgs	11.6kgs	15.2kgs	20.7kgs

Pouch Laminator with Temperature Meter

CHARACTERISTICS:

1. Temperature meter shows temperature, direct view for temperature.
2. Various temperature, cold laminating function for different laminating needs.
3. High quality, low noise, stable motor.
4. Recoverable over-heat protection system, safer to machine and user.



PD320A



PD330EX







PDA3-330LM

Model	PDA3-330LM	PD320A	PD330EX
Laminating Width:	330mm	320mm	
Laminating Speed:	0.52m/min		
Mounting Distance Between Rollers:	2mm		
Operation Temperature:	80-180℃	100-200℃	100-200℃
Heating System:	Infrared heating lamp/mica sheet heater	infrared heating lamp	
Warm Up Time:	3mins/5mins	3mins	
Laminating Thickness:	up to 250mic		
Roller Diameter:	25mm		
Roller :	4		
Document Reverse Function:	Yes		
Cooling Fan:	2	N/A or 2	
Power Consumption:	720W	620W	720W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ		
Machine Body:	Metal		
Machine Dimension:	500x220x106mm	500x200x110mm	
Machine Net Weight:	8.5kgs	7.25kgs	7.75kgs
Package:	2pcs/CTN	2pcs/CTN	
Ctn Size:	56X30x33.5cm	56.5x27x36cm	
Net Weight/Ctn:	17kgs	14.5kgs	15.5kgs
Gross Weight/Ctn:	18.5kgs	16kgs	17.2kgs

Basic Pouch Laminator

CHARACTERISTICS:

1. Various temperature, cold laminating function for different laminating needs.
2. High quality, low noise, stable motor.
3. Recoverable over-heat protection system, safer to machine and user.



FGK220/FGK260/FGK320/FGK390/FGK450





FGK-120

Model	FGK120	FGK220	FGK260	FGK320	FGK390	FGK450
Laminating Width:	120mm	220mm	260mm	320mm	390mm	450mm
Laminating Speed:	0.2m/min	0.52m/min				0.35m/min
Mounting Distance Between Rollers:	1.5mm	2mm				
Operation Temperature:	100-160℃			100-180℃		
Heating System:	infrared heating lamp					
Warm Up Time:	4mins	3mins				
Laminating Thickness:	up to 250mic					
Roller Diameter:	25mm					
Roller :	2	4				
Document Reverse Function:	No	Yes				
Cooling Fan:	N/A	N/A or 1		N/A or 2		
Power Consumption:	230W	420W	520W	620W	720W	820W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ					
Machine Body:	Metal					
Machine Dimension:	220x160x90mm	400x200x110mm	440x200x110mm	500x200x110mm	570x200x110mm	630x200x110mm
Machine Net Weight:	2.48kgs	6.1kgs	6.7kgs	7.5kgs	8.9kgs	9.5kgs
Package:	4pcs/CTN	2pcs/CTN				
Ctn Size:	44x27.5x29cm	46.5x27x36cm	51.5x27x36cm	56.5x27x36cm	64.5x27x36cm	70.5x27x36cm
Net Weight/Ctn:	9.92kgs	12.2kgs	13.4kgs	15kgs	17.8kgs	19kgs
Gross Weight/Ctn:	11.3kgs	13.5kgs	14.4kgs	16.6kgs	19.5kgs	20.5kgs

Professional Pouch Laminator

CHARACTERISTICS:

1. Roller heat up fast and evenly.
2. Various temperature, cold laminating function for different laminating needs.
3. Special heavy duty silicon rollers, good for wide laminating material.
4. Over-heat protection system, safer to machine and user.



FGK-320S



FGK6-320



FGK-650

Model	FGK320S	FGK650	FGK6-320
Laminating Width:	320mm	650mm	320mm
Laminating Speed:	0.5m/min	0.5-3.5m/min	0.4-1.6m/min
Mounting Distance Between Rollers:	2mm		
Operation Temperature:	60-160℃	70-150℃	80-150℃
Heating System:	infrared heating lamp	infrared heating lamp and mica sheet heater	roller inside heater
Warm Up Time:	3mins	20mins	3mins
Laminating Thickness:	up to 250mic		
Roller Diameter:	25mm	44mm	30mm
Roller :	4		6
Document Reverse Function:	Yes		
Cooling Fan:	2	2	2
Power Consumption:	620W	1520W	1100W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ		
Machine Body:	Metal		
Machine Dimension:	560x200x110mm	859x253x135mm	550x285x120mm
Machine Net Weight:	8.75kgs	39.7kgs	15.5kgs
Package:	2pcs/CTN	1pc/CTN	2pcs/CTN
Ctn Size:	62.5x30.5x41cm	90.3x32x23cm	62x35.5x46cm
Net Weight/Ctn:	17.5kgs	39.7kgs	31kgs
Gross Weight/Ctn:	19.5kgs	44.7kgs	33kgs

Plastic Pouch Laminator



LMP330



PL-12



PROLAM330-4R



LMP330B

Model	LMP-330	LMP-330B	PROLAM 330-4R	PL-12
Laminating Width:	330mm			
Laminating Speed:	0.4m/min			0.25m/min
Mounting Distance Between Rollers:	1.5mm			1mm
Heating System:	mica sheet heater			
Warm Up Time:	4mins			3mins
Laminating Thickness:	80-250mic			80-125mic
Roller Diameter:	20mm			15mm
Roller :	4			2
Document Reverse Function:	Yes			
Cooling Fan:	N/A			
Power Consumption:	620W			365W
Power Supplies(Optional):	AC110V-127V/60HZ,AC220V-240V/50HZ			
Machine Body:	Plastic			
Machine Dimension:	480x170x105mm	550x230x147mm	475x186x103mm	450x150x75mm
Machine Net Weight:	3.8kgs	4.25kgs	3.7kgs	1.5kgs
Package:	4pcs/CTN	2pcs/CTN	4pcs/CTN	8pcs/CTN
Ctn Size:	55.5x33x48.5cm	63x30x43cm	55.5x33x48.5cm	50.5x37x43.5cm
Net Weight/Ctn:	15.2kgs	8.5kgs	14.8kgs	12kgs
Gross Weight/Ctn:	17.2kgs	11kgs	17kgs	15kgs

Speed and Dual Heating System Laminator

CHARACTERISTICS:

1. Different laminating needs.
2. Digital display for temperature
3. Both temperature and speed adjustable,more professional
4. High quality,low noise,stable DC motor
5. Big cooling fans,secure better laminating
6. Operation memory function,emergency reverse function
7. Over-heat protection technology,safer design





PDA3-330R/PDA2-450R

Model	PDA3-330R	PDA2-450R
Laminating Width:	330mm	450mm
Laminating Speed:	0.5-3.5m/min	
Mounting Distance Between Rollers:	1.5mm	
Operation Temperature:	60-150℃	
Heating System:	infrared lamp heating and mica sheet heater	
Warm Up Time:	5mins	
Laminating Thickness:	Up to 250mic	
Roller Diameter:	35mm	
Roller :	4	
Document Reverse Function:	Yes	
Cooling Fan:	2	
Power Consumption:	780W	1080W
Power Supplies(Optional):	AC110V-127V/60HZ,AC220V-240V/50HZ	
Machine Body:	Metal	
Machine Dimension:	580x324x150mm	700x324x150mm
Machine Net Weight:	19.5kgs	21.2kgs
Package:	2pcs/CTN	2pcs/CTN
Ctn Size:	64x42x43cm	80.5x42.5x45cm
Net Weight/Ctn:	39kgs	42.4kgs
Gross Weight/Ctn:	42.9kgs	46kgs

Speed and Heating System Laminator

CHARACTERISTICS:

1. Digital display for temperature.
2. Both temperature and speed adjustable, more professional.
3. High quality, low noise, stable DC motor.
4. Big cooling fans, secure better laminating.
5. Operation memory function, emergency reverse function.
6. Over-heat protection technology, safer design.





PDA3-330T/PDA2-450T



PDA3-330TD/PDA2-450TD

Model	PDA3-330T/PDA3-330TD	PDA2-450T/PDA2-450TD
Laminating Width:	330mm	450mm
Laminating Speed:	0.4-3.3m/min	
Mounting Distance Between Rollers:	2mm	
Operation Temperature:	90-180℃	
Heating System:	mica sheet heater	
Warm Up Time:	5mins	
Laminating Thickness:	Up to 250mic	
Roller Diameter:	30mm	
Roller :	4	
Document Reverse Function:	Yes	
Cooling Fan:	2	
Power Consumption:	650W	850W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ	
Machine Body:	Metal	
Machine Dimension:	540x280x135mm	660x280x135mm
Machine Net Weight:	14.14kgs	16.8kgs
Package:	2Pcs/CTN	2pcs/CTN
Ctn Size:	61x34.5x41cm	73x34.5x41cm
Net Weight/Ctn:	28.28kgs	33.6kgs
Gross Weight/Ctn:	30.74kgs	36.17kgs

LCD Display Pouch Laminator

CHARACTERISTICS:

1. LCD display for temperature.
2. 8-bit micro process control system.
3. Various temperature, cold laminating function for different laminating needs.
4. New type temperature regulation switch, accurate temperature longer lifespan.



PDL-330



ELD-330





PDL-330L

Model	ELD-330	PDL-330	PDL-330L
Laminating Width:	330mm	330mm	330mm
Laminating Speed:	0.35m/min	0.52m/min	0.52m/min
Mounting Distance Between Rollers:	1.5mm	2mm	2mm
Operation Temperature:	0-180℃	0-180℃	0-180℃
Heating System:	infrared heating lamp	infrared heating lamp	infrared heating lamp
Warm Up Time:	3mins	3mins	3mins
Laminating Thickness:	up to 250mic	up to 350mic	up to 350mic
Roller Diameter:	20mm	25mm	25mm
Roller :	4	4	4
Document Reverse Function:	Yes	Yes	Yes
Cooling Fan:	N/A	N/A or 2	N/A or 2
Power Consumption:	610W	620W	620W
Power Supplies(Optional):	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ
Machine Body:	Metal	Metal	Metal
Machine Dimension:	480x185x110mm	500x240x105mm	500x220x110mm
Machine Net Weight:	5.05kgs	8.5kgs	8.2kgs
Package:	2pcs/CTN	2pcs/CTN	2pcs/CTN

Passport Pouch Laminator

CHARACTERISTICS:

1. 12-bit Microprocess control system
2. Touch style operation keys, fashionable, convenient and energy-saved.
3. The laminator has characteristics of fast warm up, easy operation and visible temperature indication.
4. The laminator set with several safe-protection measurements to increase the reliability.
5. The silicone roller diameter for 30.5mm, the bigger roller diameter the better lamination quality.
6. With high quality AC speed variable motor, machine run stable and have longer lifespan.



PASSPORT SP-180/SP-240





Model	PASSPORT SP-180	Passport SP-240
Max Laminating Width:	160mm	220mm
Max Laminating Thickness:	2.5mm-5mm	2.5mm-5mm
Laminating Speed:	0.3-1.2m/min	0.3-1.2m/min
Laminating Temperature:	80-180℃	80-180℃
Roller Qty:	4	4
Heating System:	Infrared Lamp and mica sheet heater	Infrared Lamp and mica sheet heater
Power Supply:	AC110V-127V/60HZ, AC220V-240V/50HZ	AC110V-127V/60HZ, AC220V-240V/50HZ
Power Consumption:	630W	730W
Machine Dimension:	364X250X130mm	416x250x130mm
Machine Net Weight:	10.4Kgs	11.4kgs

Passport Pouch Laminator

CHARACTERISTICS:

1. 12-bit Microprocess control system
2. Touch style operation keys, fashionable, convenient and energy-saved.
3. The laminator has characteristics of fast warm up, easy operation and visible temperature indication.
4. The laminator set with several safe-protection measurements to increase the reliability.
5. The silicone roller diameter for 30.5mm, the bigger roller diameter the better lamination quality.
6. With high quality Dc speed variable motor, machine run stable and have longer lifespan.

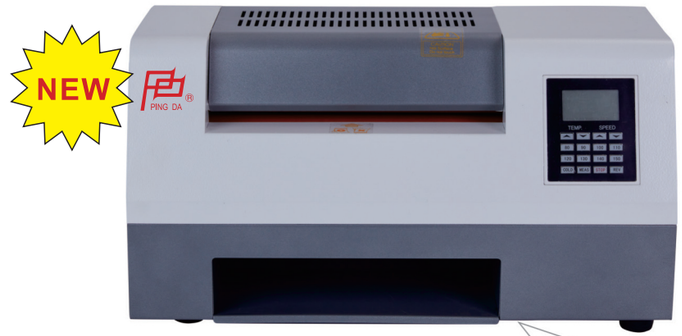

SP-240 PRO





Model	SP-240 PRO
Max Laminating Width:	230mm
Max Laminating Thickness:	2.5mm-5mm
Laminating Speed:	0.3-1.2m/min
Laminating Temperature:	80-180℃
Roller Qty:	4
Heating System:	Infrared Lamp and mica sheet heater
Power Supply:	AC110V-127V/60HZ, AC220V-240V/50HZ
Power Consumption:	730W
Machine Dimension:	440x285x235mm
Machine Net Weight:	14.7kgs

LCD Display Pouch Laminator

CHARACTERISTICS:

1. LCD display for temperature.
2. 8-bit micro process control system.
3. Over-heat protection technology, safer design.
4. Auto Sleep Mode to save energy.



TL-330LCD

Model	TL-330LCD
Laminating Width:	330mm
Laminating Speed:	0.52m/min
Mounting Distance Between Rollers:	1.5mm
Operation Temperature:	80-180℃
Heating System:	roller inside heater
Warm Up Time:	5mins
Laminating Thickness:	Up to 350mic
Roller Diameter:	25mm
Roller :	4
Document Reverse Function:	Yes
Cooling Fan:	2
Power Consumption:	620W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ
Machine Body:	Metal
Machine Dimension:	500x220x105mm
Machine Net Weight:	8.15kgs
Package:	2pcs/CTN

LCD Display Pouch Laminator

CHARACTERISTICS:

1. LCD display for temperature
2. 8-bit micro process control system.
3. Over-heat protection technology, safer design.
4. Auto Sleep Mode to save energy.



PDA4-230LCD/PDA3-330LCD

Model	PDA4-230LCD	PDA3-330LCD
Laminating Width:	240mm	330mm
Laminating Speed:	0.52m/min	0.52m/min
Mounting Distance Between Rollers:	1.5mm	1.5mm
Operation Temperature:	80-180℃	80-180℃
Heating System:	roller inside heater	roller inside heater
Warm Up Time:	5mins	5mins
Laminating Thickness:	Up to 350mic	Up to 350mic
Roller Diameter:	25mm	25mm
Roller :	4	4
Document Reverse Function:	Yes	Yes
Cooling Fan:	2	2
Power Consumption:	420W	620W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ	
Machine Body:	Metal	Metal
Machine Dimension:	410x240x105mm	500x240x105mm
Machine Net Weight:	6.55kgs	8.3kgs
Package:	2pcs/CTN	2pcs/CTN
Ctn Size:	48x30x33.5cm	56x30x33.5cm
Net Weight/Ctn:	13.1kgs	16.6kgs
Gross Weight/Ctn:	15.6kgs	18.6kgs

LCD Display Pouch Laminator

CHARACTERISTICS:

1. LCD display for temperature and speed
2. 8-bit micro process control system
3. High quality, low noise DC motor
4. Key press control panel, convenient operation
5. 6 rollers for professional laminating



PDA3-336HL



PC336L



PFG336

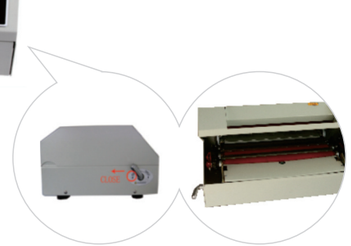



Model	PDA3-336HL	PC336L	PFG336
Laminating Width:	330mm		
Laminating Speed:	0.3-1.6m/min		0.3-2.4m/min
Mounting Distance Between Rollers:	2mm		
Operation Temperature:	80-180℃		
Heating System:	roller inside heater		roller inside heater
Warm Up Time:	5mins		
Laminating Temperature:	Up to 250mic	Up to 350mic	Up to 250mic
Roller Diameter:	25mm	30mm	
Roller :	6		
Document Reverse Function:	Yes		
Cooling Fan:	1		3
Power Consumption:	850W	950W	1050W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ		
Machine Body:	Metal		
Machine Dimension:	535x276x120mm	535x280x130mm	575x330x155mm
Machine Net Weight	12.75kgs	15kgs	25kgs
Package:	2PCS/CTN	2pcs/CTN	1pcs/CTN
Ctn Size:	64x34.5x41cm	64x34.5x41cm	66x46x25.5cm
Net Weight/Ctn:	25.5kgs	29.2kgs	25kgs
Gross Weight/Ctn:	27.84kgs	32kgs	27kgs

LCD Display Pouch Laminator

CHARACTERISTICS:

1. LCD display for temperature and speed.
2. 8-bit micro process control system.
3. Both temperature and speed adjustable, more professional.
4. High quality, low noise, stable DC motor.
5. Big cooling fans, secure better laminating.
6. Operation memory function, emergency reverse function.
7. Over-heat protection technology, safer design.



PDA4-230SL/PDA3-330SL



Hot Roller Design



Outside Heating Design





LCD display



Hot Roller Design

Model	PDA4-230SL	PDA3-330SL	PDA3-330TL
Laminating Width:	240mm	330mm	
Laminating Speed:	0.3-1.6m/min		
Mounting Distance Between Rollers:	1.5mm		2mm
Operation Temperature:	80-180℃		
Heating System:	roller inside heater/mica sheet heater		
Warm Up Time:	5mins		
Laminating Temperature:	Up to 250mic		
Roller Diameter:	25mm		30mm
Roller :	4		
Document Reverse Function:	Yes		
Cooling Fan:	1		
Power Consumption:	450W/450W	550W/650W	550W/650W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ		
Machine Body:	Metal		
Machine Dimension:	416x250x130mm	506x250x130mm	540x280x135mm
Machine Net Weight	7.5kgs/7.9kgs	9.8kgs/10.2kgs	13kgs/13.5kgs
Package:	2pcs/CTN	2pcs/CTN	2PCS/CTN
Ctn Size:	49x34.5x41cm	57x34.5x41cm	64x34.5x41cm
Net Weight/Ctn:	15kgs/15.4kgs	19.6kgs/20.4kgs	26kgs/27kgs
Gross Weight/Ctn:	17kgs/17.4kgs	22.2kgs/23kgs	27.8kgs/28.8kgs

LCD Display Pouch Laminator

CHARACTERISTICS:

1. 12-bit Microprocess control system
2. Touch style operation keys, fashionable, convenient and energy-saved.
3. The laminator has characteristics of fast warm up, easy operation and visible temperature indication.
4. The laminator set with several safe-protection measurements to increase the reliability.
5. The silicone roller diameter for 30mm, the bigger roller diameter the better lamination quality.
6. With high quality AC speed variable motor, machine run stable and have longer lifespan.
7. Install heat isolation structure inside, machine surface temperature will be lower than 60C even when operate with highest setting temperature
8. Auto Sleep Function: if not operate machine during 2hrs, then machine will automatically get into sleep mode, this will save energy and cause less damage to spare parts, make machine lifespan longer.
9. Machine can laminate 350mic film with carrier, high quality and perfect protection for lamination with carrier.





PD336R

Model	PD336R
Laminating Width:	330mm
Laminating Speed:	0.5-2m/min
Mounting Distance Between Rollers:	1.5mm
Operation Temperature:	80-180℃
Heating System:	roller inside heater
Warm Up Time:	5mins
Laminating Temperature:	Up to 350mic
Roller Diameter:	30mm
Heating System:	4 Heated Rollers
Roller :	6
Document Reverse Function:	Yes
Cooling Fan:	Yes
Power Consumption:	2
Power Supplies(Optional):	1050W
Machine Body:	AC110V-127V/60HZ, AC220V-240V/50HZ
Machine Dimension:	540x270x130mm
Machine Net Weight:	15.4kgs
Package:	2pcs/CTN

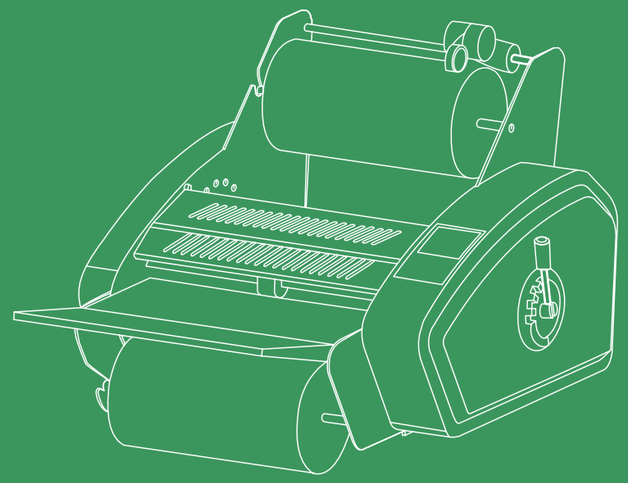

Roll Laminator

Automatical Roll Laminator	21-22
Semi Automatical Roll Laminator	23
New Technology Roll Laminator	24
Eco Roll Laminator	25
FOIL Roll Laminator	26
Classic Roll Laminator	27-28

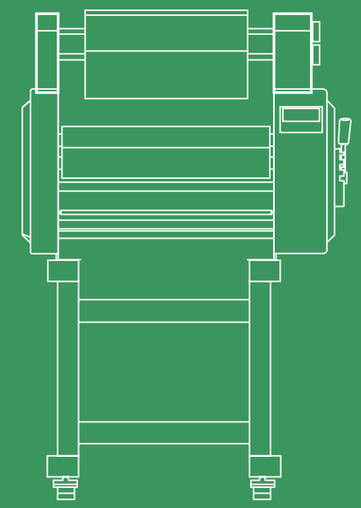

Hot Laminator

29-30



Cold Laminator

Electrical and Manual Cold Laminator	31
Cold Laminator	32-33

PING DA ®

Automatical Roll Laminator

CHARACTERISTICS:

1. Hot and Cold Lamination.
2. High Quality Imported Silicon Roller.
3. Single/Double Lamination Speed Adjustable (1-9), Different materials lamination satisfied with different customers requirements.
4. LCD Display,up and down roller separated temperature display,touch buttons display different temperatures directly.
5. Infrared temperature control,reliable and instant temperature measurement,no attach and no damage to roller.
6. De-curler,adjust it for different thickness papers to ensure flat lamination effect.
7. Auto cut device,after lamination cut off product directly.



PD360C PLUS/PD480C PLUS



Smart operation system, simple and convenient.



Adjustable Pressure Handle for different paper.



De-curler,adjust it for different thickness papers to ensure flat lamination effect.



Operation platform can put 150pcs paper.



Auto paper feeding structure, practical and convenient.



Auto cutdevice,after lamination cut off product directly.

Model	PD360C PLUS	PD480C PLUS
Laminating Width:	360mm	480mm
Laminating Speed:	0.8-3m/min	0.8-3m/min
Mounting Distance Between Rollers:	1.5mm	1.5mm
Operation Temperature:	0-150° C or 180° C	0-150° C or 180° C
Heating System:	roller inside heater	roller inside heater
Warm Up Time:	8mins	8mins
Laminating Thickness:	Up to 150mic	Up to 150mic
Roller Diameter:	55mm	55mm
Roller :	6	6
Document Reverse Function:	Yes	Yes
De-Curler System:	Yes	Yes
Automatically Feeding Paper:	Yes	Yes
Automatically Cutting Paper:	Single and double	Single and double
Power Consumption:	1300W	1400W
Power Supplies(Optional):	110V/60HZ,220V/50HZ	110V/60HZ,220V/50HZ
Machine Dimension:	630x1270x1140mm	750x1270x1140mm
Machine Net Weight:	63.4kgs	70kgs
Package:	1pc/CTN	1pc/CTN

Automatical Roll Laminator

CHARACTERISTICS:

1. Hot and Cold Lamination.
2. High quality roller with imported silicon rubber.
3. Single/Double Lamination Speed Adjustable (1-9),different materials lamination satisfied with different customers requirements.
4. LCD Display,up and down roller separated temperature display, touch buttons display different temperatures directly.
5. Infrared temperature control,reliable and instant temperature measurement no attach and no damage to roller.
6. De-curler,adjust it for different thickness papers to ensure flat lamination effect.
7. With hole puncher,punch holes on film before lamination,easy tear off the laminated product;with slitter to cut off unnecessary film during lamination.



PD360C/PD480C



Smart operation system, simple and convenient.



Adjustable Pressure Handle for different paper.



De-curler,adjust it for different thickness papers to ensure flat lamination effect.



Operation platform can put 150pcs paper.



Auto paper feeding structure, practical and convenient.



Auto cut film device,after lamination cut off product directly.

Model	PD360C	PD480C
Laminating Width:	360mm	480mm
Laminating Speed:	0.8-3m/min	
Mounting Distance Between Rollers:	1.5mm	
Operation Temperature:	0-150℃ or 180° C	
Heating System:	roller inside heater	
Warm Up Time:	8mins	
Laminating Thickness:	Up to 150mic	
Roller Diameter:	55mm	
Roller :	6	
Document Reverse Function:	Yes	
De-Curler System	Yes	
Automatically Feeding Paper	Yes	
Automatically Cutting Paper	Single-faced	
Cooling Fan:	1	
Power Consumption:	1300W	1500W
Power Supplies(Optional):	110V/60HZ,220V/50HZ	
Machine Body:	Metal	
Machine Dimension:	630x1270x1140mm	750x1270x1140mm
Machine Net Weight:	66kgs	70kgs
Package:	1pc/CTN	
Ctn Size:	76x70x60cm	88x70x60cm
Net Weight/Ctn:	66kgs	70kgs
Gross Weight/Ctn:	84kgs	94kgs

Semi automatical Roll Laminator

CHARACTERISTICS:

1. Hot and Cold Lamination.
2. High quality roller with imported silicon rubber.
3. Single/Double Lamination Speed Adjustable (1-9),different materials lamination satisfied with different customers requirements.
4. LCD Display,up and down roller separated temperature display, touch buttons display different temperatures directly.
5. Infrared temperature control,reliable and instant temperature measurement,no attach and no damage to roller.
6. De-curler,adjust it for different thickness papers to ensure flat lamination effect.
7. With hole puncher,punch holes on film before lamination,easy tear off the laminated product;with slitter to cut off unnecessary film during lamination.



PD360B/PD480B



Smart operation system, simple and convenient.



Adjustable Pressure Handle for different paper.



De-curler,adjust it for different thickness papers to ensure flat lamination effect.



Operation platform can put 150pcs paper.



Auto paper feeding structure, practical and convenient.

Model	PD360B	PD480B
Laminating Width:	360mm	480mm
Laminating Speed:	0.8-3m/min	0.8-3m/min
Mounting Distance Between Rollers:	1.5mm	
Operation Temperature:	0-150° C or 180° C	
Heating System:	roller inside heater	
Warm Up Time:	8mins	
Laminating Thickness:	Up to 150mic	
Roller Diameter:	55mm	
Roller :	4	
Document Reverse Function:	Yes	
De-Curler System	Yes	
Automatically Feeding Paper	Yes	
Cooling Fan:	1	
Power Consumption:	1300W	1500W
Power Supplies(Optional):	AC110V-127V/60HZ,AC220V-240V/50HZ	
Machine Body:	Metal	
Machine Dimension:	630x780x1140mm	750x780x1140mm
Machine Net Weight:	55kgs	61.4kgs
Package:	1pc/CTN	1pc/CTN
Ctn Size:	76x70x60cm	88x70x60cm
Net Weight/Ctn:	55kgs	61.4kgs
Gross Weight/Ctn:	72kgs	83.2kgs

New Technology Roll Laminator

CHARACTERISTICS:

1. Hot and Cold Lamination.
2. High quality roller with imported silicon rubber.
3. Single/Double Lamination Speed Adjustable (1-9),different materials lamination satisfied with different customers requirements.
4. LCD Display,up and down roller separated temperature display, touch buttons display different temperatures directly.
5. Infrared temperature control,reliable and instant temperature measurement,no attach and no damage to roller.
6. De-curler,adjust it for different thickness papers to ensure flat lamination effect.
7. With hole puncher,punch holes on film before lamination,easy tear off the laminated product;with slitter to cut off unnecessary film during lamination.



PD360A/PD480A/PD650A



Smart operation system, simple and convenient.



Adjustable Pressure Handle for different paper.



De-curler,adjust it for different thickness papers to ensure flat lamination effect.

Model	PD360A	PD480A	PD650A
Laminating Width:	360mm	480mm	650mm
Laminating Speed:	0.8-3m/min		
Mounting Distance Between Rollers:	1.5mm		
Operation Temperature:	0-150° C or 180° C		
Heating System:	roller inside heater		
Warm Up Time:	8mins		
Laminating Thickness:	Up to 150mic		
Roller Diameter:	55mm		
Roller :	4		
Document Reverse Function:	Yes		
De-Curler System	Yes		
Cooling Fan:	1		
Power Consumption:	1000W	1200W	1600W
Power Supplies(Optional):	AC110V-127V/60HZ,AC220V-240V/50HZ		
Machine Body:	Metal		
Machine Dimension:	630x780x1140mm	750x780x1140mm	920x780x1140mm
Machine Net Weight:	50.5kgs	59.4kgs	77kgs
Package:	1pc/CTN		
Ctn Size:	76x70x60cm	88x70x60cm	108x70x60cm
Net Weight/Ctn:	50.5kgs	59.4kgs	77kgs
Gross Weight/Ctn:	72kgs	82.2kgs	95kgs

Eco Roll Laminator

CHARACTERISTICS:

1. Temperature digital display, direct and convenient.
2. Roller inside heater system, e翱 ciency and stable heat for rollers 8-bit micro process control system.
3. Key press control panel, easier and more convenient operation.
4. Pouch film and roll film laminating, hot and cold laminating functions satisfy various needs of different customers.
5. Both temperature and speed adjustable for more professional use high quality, low noise, speed adjustable motor.





PDFM360mini/PDFM480mini

Model	PDFM360mini	PDFM480mini
Laminating Width:	360mm	480mm
Laminating Speed:	0.7-2m/min	0.7-2.0m/min
Mounting Distance Between Rollers:	2mm	2mm
Operation Temperature:	0-150℃	0-150° C
Heating System:	roller inside heater	roller inside heater
Warm Up Time:	5mins	5mins
Laminating Thickness:	Up to 150mic	UP to 150mic
Roller Diameter:	30mm	30mm
Roller:	4	4
Document Reverse Function:	Yes	Yes
Cooling Fan:	N/A	N/A
Power Consumption:	730W	930W
Power Supplies(Optional):	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ
Machine Body:	Metal	Metal
Machine Dimension:	562x318x300mm	682x318x300mm
Machine Net Weight	13.75kgs	15Kgs
Package:	1pc/CTN	1pc/CTN
Ctn Size:	62.5x38x37cm	75x38x37cm
Net Weight/Ctn:	13.75kgs	15Kgs
Gross Weight/Ctn:	15.5kgs	17.5kgs

FOIL Roll Laminator

CHARACTERISTICS:

1. Temperature digital display, direct and convenient.
2. Roller inside heater system, e翱 ciency and stable heat for rollers 8-bit micro process control system.
3. Key press control panel, easier and more convenient operation.
4. Pouch film and roll film laminating, hot and cold laminating functions satisfy various needs of different customers.
5. Both temperature and speed adjustable for more professional use high quality, low noise, speed adjustable motor.





FOIL 360MINI / FOIL 480MINI

Model	FOIL 360mini	FOIL 480mini
Laminating Width:	360mm	480mm
Laminating Speed:	0.7-2m/min	0.7-2.0m/min
Mounting Distance Between Rollers:	2mm	2mm
Operation Temperature:	0-150℃	0-150° C
Heating System:	roller inside heater	roller inside heater
Warm Up Time:	5mins	5mins
Laminating Thickness:	Up to 150mic	UP to 150mic
Roller Diameter:	30mm	30mm
Roller:	4	4
Document Reverse Function:	Yes	Yes
Cooling Fan:	N/A	N/A
Power Consumption:	730W	930W
Power Supplies(Optional):	110V/60HZ, 220V/50HZ	110V/60HZ, 220V/50HZ
Machine Body:	Metal	Metal
Machine Dimension:	585x350x246mm	705x350x246mm
Machine Net Weight	15.5kgs	18Kgs
Package:	1pc/CTN	1pc/CTN
Ctn Size:	63x36x29cm	75x36x29cm
Net Weight/Ctn:	15.5kgs	18Kgs
Gross Weight/Ctn:	17kgs	19.5kgs

Classic Roll Laminator

CHARACTERISTICS:

1. Temperature digital display, direct and convenient.
2. Roller inside heater system, e翱 ciency and stable heat for rollers 8-bit micro process control system.
3. Key press control panel, easier and more convenient operation.
4. Pouch film and roll film laminating, hot and cold laminating functions satisfy various needs of different customers.
5. Both temperature and speed adjustable for more professional use high quality, low noise, speed adjustable motor.



PDFM1100



PDFM650



PDFM360h/PDFM480h



PDFM360/PDFM480

Model	PDFM360/PDFM360h	PDFM480/PDFM480h	PDFM650	PDFM1100
Laminating Width:	360mm	480mm	650mm	1070mm
Laminating Speed:	0.36-1.9m/min		0.4-3.3m/min	
Mounting Distance Between Rollers:	1.5mm			
Operation Temperature:	0-150℃			
Heating System:	roller inside heater			
Warm Up Time:	8mins			
Laminating Thickness:	Up to 150mic			
Roller Diameter:	43.5mm	43.5mm	55mm	75mm
Roller:	4			
Document Reverse Function:	Yes			
Upper Roller:	N/A or 2	N/A or 2	2	5
Power Consumption:	1000W	1200W	1500W	2400W
Power Supplies(Optional):	AC110V-127V/60HZ, AC220V-240V/50HZ			
Machine Body:	Metal			
Machine Dimension:	645x435x270mm	765x435x270mm	990x435x300mm	350x600x1200mm
Machine Net Weight:	28kgs/27.8kgs	33.6kgs/28.2kgs	62.6kgs	135kgs
Package:	1pc/CTN			
Ctn Size:	77x63x46cm	89x63x46cm	118x70x65cm	153x65x75cm
Net Weight/Ctn	28kgs/27.8kgs	33.6kgs/28.2kgs	62. 6kgs	135kgs
Gross Weight/Ctn	35kgs/33.4kgs	44.4kgs/41.6kgs	74. 6kgs	173kgs

Classic Roll Laminator

CHARACTERISTICS:

1. Temperature digital display, direct and convenient.
2. Roller inside heater system, e翱 ciency and stable heat for rollers 8-bit micro process control system.
3. Key press control panel, easier and more convenient operation.
4. Pouch film and roll film laminating, hot and cold laminating functions satisfy various needs of different customers.
5. Both temperature and speed adjustable for more professional use high quality, low noise, speed adjustable motor.
6. De-curler, adjust it for different thickness papers to ensure flat lamination effect.





PDFM360 STEEL/PDFM480 STEEL









Model	PDFM360 STEEL	PDFM480 STEEL
Laminating Width:	360mm	480mm
Laminating Speed:	0.36-1.9m/min	
Mounting Distance Between Rollers:	1.5mm	
Operation Temperature:	0-150℃	
Heating System:	roller inside heater	
Warm Up Time:	8mins	
Laminating Thickness:	Up to 150mic	
Roller Diameter:	43.5mm	
Roller:	4	
Document Reverse Function:	Yes	
Upper Roller:	Steel	
Power Consumption:	1000W	1200W
Power Supplies(Optional):	AC110V-127V/60HZ，AC220V-240V/50HZ	
Machine Body:	Metal	
Machine Dimension:	645x435x270mm	765x435x270mm
Machine Net Weight:	28.9kgs	33.3kgs
Package:	1pc/CTN	
Ctn Size:	77x64x46cm	94x69x56cm
Net Weight/Ctn	28.9kgs	33.3kgs
Gross Weight/Ctn	35.3kgs	42.5kgs

Hot Laminator

CHARACTERISTICS:

1. Hot and Cold Lamination.
2. High Quality imported silicon rollers,and heavy duty design rollers,suitable for different types and various thickness films,such as hot lamination film and acrylic plastic film,all can get great lamination result.
3. Single/Double Lamination Speed Adjustable (1-9),Different materials lamination satisfied with different customers requirements.
4. LCD Display,up and down roller separated temperature display,touch buttons display different temperatures directly.
5. Infrared temperature control,reliable and instant temperature measurement,no attach and no damage to roller.
6. Rewinding during the lamination,can rewind the protection layer from film directly,easy and convenient operation.





Model	HL-880B	HL-1000B
Laminating Width:	850mm	1000mm
Film Type:	crystal film, tempered film, acrylic film,gold diamond film.	crystal film, tempered film, acrylic film,gold diamond film.
Laminating Speed:	0.8-3m	0.8-3m
Operation Temperature:	0-150°	0-150°
Warm Up Time:	10mins	10mins
Core Size:	3 and 1	3 and 1
Roller:	4	4
Roller Diameter:	75mm	75mm
Single Or Double Laminating:	Single and double	Single and double
Power Supplies(Optional):	220-240V	220-240V
Power Consumption:	2300W	2500W
Machine Dimension:	1150x670x1130mm	1300x670x1130mm
Package:	1pc/CTN	1pc/CTN

Hot Laminator

CHARACTERISTICS:

1. Hot and Cold Lamination.
2. High Quality imported silicon rollers,and heavy duty design rollers,suitable for different types and various thickness films,such as hot lamination film and acrylic plastic film,all can get great lamination result.
3. Single/Double Lamination Speed Adjustable (1-9),Different materials lamination satisfied with different customers requirements.
4. LCD Display,up and down roller separated temperature display,touch buttons display different temperatures directly.
5. Infrared temperature control,reliable and instant temperature measurement,no attach and no damage to roller.
6. Rewinding during the lamination,can rewind the protection layer from film directly,easy and convenient operation.



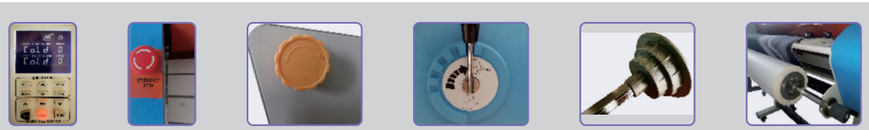

Model	HL-880
Laminating Width:	850mm
Film Type:	crystal film, tempered film, acrylic film,gold diamond film.
Laminating Speed:	0.8-3m
Operation Temperature:	0-150°
Warm Up Time:	10mins
Core Size:	3 and 1
Roller:	4
Roller Diameter:	105mm
Single Or Double Laminating:	Single and double
Power Supplies(Optional):	220-240V
Power Consumption:	2300W
Machine Dimension:	1150x670x1130mm
Package:	1pc/CTN

Electrical and Manual Cold Laminator

CHARACTERISTICS:

1.This machine is driven by permanent magnet motor and cold mounting evenly.
2.This machine rubber roller uses high quality silicone rubber roller,the service life of silicone rubber roller is two times that of ordinary rubber roller,silicone rubber roller is not easy to aging and eformation,more scratch resistance, and lamination not get bubbles easily.
3.Use foldabletables for easy operation and movement.
4.One-button switch operation is more integrated and convenient.
5.Both electrical and manual available on same machine,more e翱 cient when have electricity,still can use manual when black out.



Electrical and Manual Silicone Rubber cold Laminator
LBD-650/LBD700/LBD750



Electrical and Manual Silicone Rubber Cold Laminator
LBD-1000







Cold Laminator

Model	LBD-650	LBD-700	LBD-750	LBD-1000
Laminating Width	650mm	700mm	750mm	1000mm
Laminating Thickness	10mm			
Diameter Of Roller	66mm			
Laminating Speed	0.87mm/min			
Power Consumption	14W			
Power Supplies(Optional)	AC110V/AC220V			
Machine Dimension	755X192X225mm	805X192X225mm	855X192X225mm	1105X192X225mm
Machine Net Weight	11.15Kgs	12Kgs	12.5Kgs	16.5Kgs
Foot Step Control	NO	NO	NO	YES

Cold Laminator



LBS320



LBS700/LBS1000

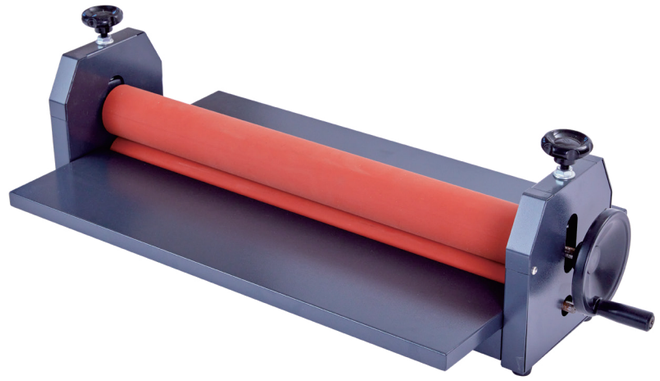

LBS650A/LBS700A/LBS750A/LBS1000A

Cold Laminator

Model	LBS320	LBS700	LBS1000	LBS650A	LBS 700A	LBS 750A	LBS1000A
Laminating Width	320mm	700mm	1000mm	650mm	700mm	750mm	1000mm
Laminating Thickness	10mm	10mm	10mm	10mm	10mm	10mm	10mm
Diameter Of Roller	28mm	66mm	66mm	68mm	68mm	68mm	68mm

Cold Laminator



LBS1300B/LBS1600B



LBS1300D/LBS1600D

Cold Laminator

Model	LBS1300B	LBS1600B	LBS1300D	LBS1600D
Laminating Width	1300mm	1600mm	1300mm	1600mm
Laminating Thickness	10mm	10mm	25mm	25mm
Diameter Of Roller	130mm	130mm	130mm	130mm
Laminating Speed			4.1-9.3m/min	4.1-9.3m/min

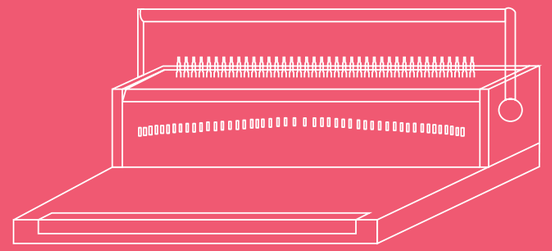

Binding Machine

Punching Machine 35-39
Binding Machine 40-43

PING DA

Punching Machine



WB-50

Professional Punching Machine

Model	WB-50
Punching Capacity:	500 sheets 70g paper(50mm)
Punching Hole Diameter:	ϕ3-ϕ8mm
Hole Distance Adjustable Range:	3-30mm
High-Tech Drill:	Punch easily both manual and Electrical
Working Table Size:	460x255mm
Working Table:	Movable,Fix position for punching
Punching Hole Mode:	3H,4H,6H
Power Supply:	110V/60HZ,220V/50HZ
Power Consumption:	120W
Machine Dimension:	430x460x500mm
Machine Net Weight:	20kgs
Package:	1pc/CTN
Ctn Size:	625x400x695mm
Net Weight/Ctn:	20kgs
Gross Weight/Ctn:	23kgs

Punching Machine



S450



K500A

Tube Binding Machine(Accounting Document Binding)

Model	S450	K500A
Binding Material:	Paper	Paper
Binding Type:	Tube Binding	Tube Binding
Punching And Binding Capacity	45mm	50mm
Punching Hole Diameter:	ϕ5mm	
Margin Adjustable Range:	5-22mm	
Preheat Time:	15s	
Power Supply:	220V/50HZ	
Power Consumption:	160W	
Current:	0 3A	
Mahcine Dimension:	370x310x505mm	45x340x500mm
Net Weight:	8·5kgs	9·5kgs
Package:	2pcs/CTN	
Ctn Size:	790x440x400mm	770x395x400mm
Net Weight/Ctn	17kgs	19kgs
Gross Weight/Ctn	18kgs	20kgs

Punching Machine



DK50

Tube Binding Machine(Accounting Document Binding)

Model	DK50(Electrical Punching)
Binding Material:	Paper
Binding Type:	Thermal Tube Binding
Punching And Binding Capacity	50mm
Punching Hole Diameter:	ϕ5mm
Margin Adjustable Range:	5-22mm
Preheat Time:	25s
Power Supply:	220V/50HZ
Power Consumption:	160W
Current:	0.3A/12V
Mahcine Dimension:	425x345x505mm
Net Weight:	10kgs
Package:	1pc/CTN
Ctn Size:	495x420x475mm
Net Weight/Ctn	10kgs
Gross Weight/Ctn	11kgs

Punching Machine



S300



S30

Tube Binding Machine(Accounting Document Binding)

Model	S30	S300
Binding Material:	Paper	
Binding Type:	Tube Binding	
Punching And Binding Capacity	30mm	
Punching Hole Diameter:	ϕ5mm	
Margin Adjustable Range:	5-22mm	7-20mm
Preheat Time:	15s	
Power Supply:	220V/50HZ	
Power Consumption:	160W	
Current:	0.3A	
Mahcine Dimension:	370x310x425mm	300x200x433mm
Net Weight:	6.8kgs	3.5kgs
Package:	2pcs/CTN	4pcs/CTN
Ctn Size:	700x440x400mm	770x395x400mm
Net Weight/Ctn	13.6kgs	14kgs
Gross Weight/Ctn	15kgs	16kgs

Punching Machine



290A



290B



T30

Punching Machine

Model	290A	290C	T30
Punching Material:	Paper	Paper	Paper
Punching Capacity:	15mm	15mm	30mm
Punching Hole:	2 holes	4 holes	Single
Punching Hole Diameter:	ϕ6mm	ϕ6mm	ϕ3·5-ϕ6mm
Margin Adjustable Range:	70-80mm	70-80mm	7-20mm
Machine Dimension:	318x159x132mm	318x132x300mm	320x140x230mm
Net Weight:	3kgs	5·5kgs	1·8kgs
Package:	6pcs/CTN	3Pcs/CTN	4Pcs/CTN
Ctn Size:	440x350x350mm	440x350x350mm	660x370x260mm
Net Weight/Ctn	18kgs	16·5kgs	7·5kgs
Gross Weight/Ctn	21kgs	18kgs	8·5kgs

Binding Machine



CW2500A



WW2500A



SW2500A

Multifunctional Binding Machine

Model	CW2500A(Comb and Wire 3:1)	WW2500A(Wire 3:1 and Wire 2:1)	SW2500A(Wire and Coil)
Max.punching Capacity:	25 sheets	20 sheets	25sheets
Max.binding Capacity:	500 sheets/140 sheets	140 sheets/300 sheets	140 sheets/500 sheets
Max.binding Width:	330mm(F4)		
Hole Pitch For Comb Binding	24pins (hole size 8x3mm)	40pins(3:1,hole size 4x4mm or ϕ4mm round hole)	40pins (3:1,hole size 4x4mm or ϕ4mm round hole)
Hole Pitch For Wire Binding	40pins (3:1,hole size 4x4mm or ϕ4 mm round hole	27 pins (2:1,hole size 3.5x5.5mm or 5.5x5.5mm)	54pins(4:1,hole size ϕ4mm or 4mmx ϕ4mm)or 56pins (hole size3.6mmx ϕ5mm)
Adjustable Margin:	2.5mm,4.5mm,6.5mm		
Quantity Of Selectable Cutter:	All		
Body Material:	Metal Body,Metal Base		
Machine Dimension:	480x405x220mm		
Net Weight:	28.5kgs	25.5kgs	28.5kgs
Package:	1pc/CTN		
Ctn Size:	570x510x310mm		
Net Weight/Ctn:	28.5kgs	25.5kgs	28.5kgs
Gross Weight/Ctn:	32kgs	28kgs	32kgs

Binding Machine



S15



S12



S20A

Coil Binding Machine(Spiral Binding Machine)

Model	S12	S15	S20A
Max.punching Capacity:	12 sheets	15 sheets	20 sheets
Max.binding Capacity:	120sheets		150 sheets
Max.binding Width:	300mm(A4)		
Hole Pitch:	49 pins (6mm pitch,hole size3.6mm x ϕ 5mm)	49 pins 6mm pitch,hole size3.6mm x ϕ5mm)	59 pins(5:1,hole size ϕ3.2mm)
Adjustable Margin:	2.5mm,4.5mm,6.5mm		
Quantity Of Selectable Cutter:	None		
Body Material:	Plastic Body,Metal Base		
Machine Dimension:	375x260x120mm		435x335x205mm
Net Weight:	5.8kgs	6kgs	6.7kgs
Package:	4pcs/CTN	4pcs/CTN	2pcs/CTN
Ctn Size:	780x440x340mm		455x430x355mm
Net Weight/Ctn:	23.2kgs	24kgs	13.4kgs
Gross Weight/Ctn:	26kgs	27kgs	16kgs

Binding Machine



C20A



C200A



C25A

Comb Binding Machine

Model	C20A	C200A	C25A
Max.punching Capacity:	20 sheets	20 sheets	25 sheets
Max.binding Capacity:	500 sheets		
Max.binding Width:	300mm(A4)	300mm(A4)	330mm(F4)
Hole Pitch:	21 pins(hole size 8x3mm)		24 pins (hole size 8x3mm)
Adjustable Margin:	2.5mm,4.5mm,6.5mm		
Quantity Of Selectable Cutter:	21(All)		24(All)
Body Material:	Plastic Body,Metal Base	Metal Body,Metal Base	Metal Body,Metal Base
Machine Dimension:	435x335x205mm	400x390x195mm	400x390x195mm
Net Weight:	6.7kgs	8.6kgs	14.8kgs
Package:	2pcs/CTN	2pcs/CTN	1pc/CTN
Ctn Size:	455x430x355mm	450x350x450mm	577x403x285mm
Net Weight/Ctn:	13.4kgs	17.2kgs	14.8kgs
Gross Weight/Ctn:	16kgs	20kgs	20kgs

Binding Machine



W20A



W25A



W200A

Wire Binding Machine

Model	W20A	W200A	W25A(2:1)
Max.punching Capacity:	20 sheets		25 sheets
Max.binding Capacity:	140 sheets		140 sheets
Max.binding Width:	300mm(A4)		330mm(F4)
Hole Pitch:	34pins(3:1,hole size4x4mm or ϕ5 mm round hole)		27 pins (2:1,hole size 3.5x5.5mm or 5.5x5.5mm)
Adjustable Margin:	2.5mm,4.5mm,6.5mm		2.5mm,4.5mm,6.5mm
Quantity Of Selectable Cutter:	34(All)		27(All)
Body Material:	Plastic Body,Metal Base		Metal Body,Metal Base
Machine Dimension:	435x335x205mm	400x390x195mm	465x330x220mm
Net Weight:	6.7kgs	10.5kgs	16.8kgs
Package:	2pcs/CTN		1pc/CTN
Ctn Size:	455x430x355mm		577x403x285mm
Net Weight/Ctn:	13.4kgs	21kgs	16.8kgs
Gross Weight/Ctn:	16kgs	24kgs	20kgs

